

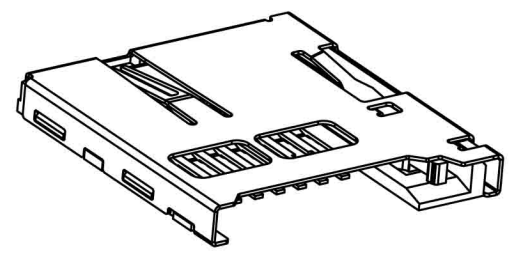
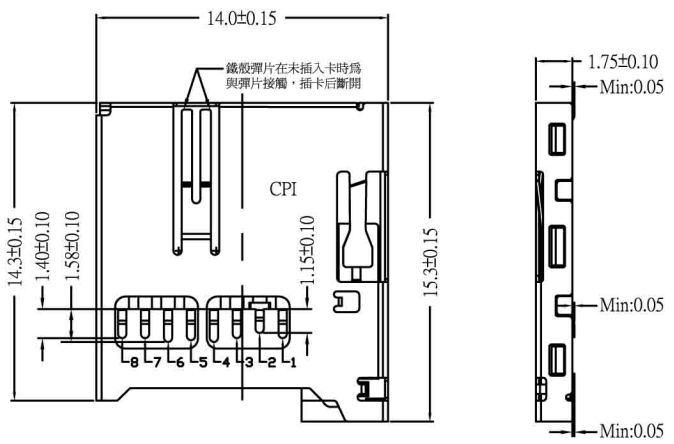
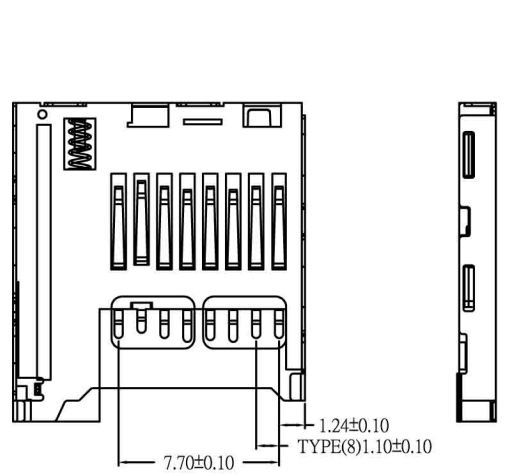
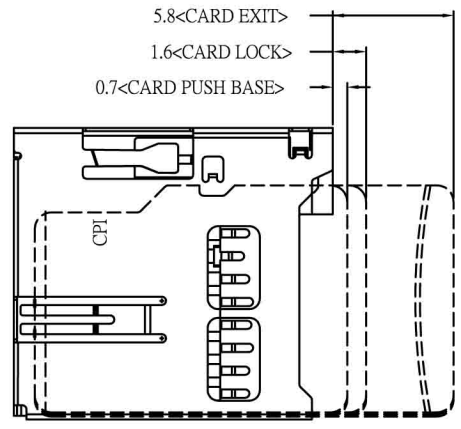


RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	DEC. 10'10

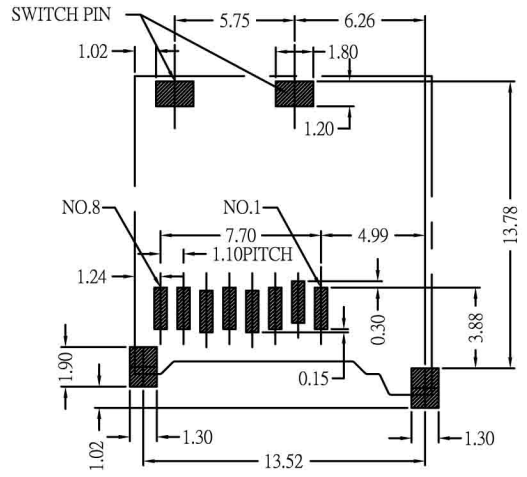

- NOTES:
- ELECTRICAL :**  
 VOLTAGE :100V AC  
 CURRENT : 0.5A Max  
 CONTACT RESISTANCE : 40MΩ MAX  
 VOLTAGE PROOF : 500V AC  
 INSULATION RESISTANCE : 1000MΩ MIN
  - MECHANICAL :**  
 CARD INSERTION/WITHDRAWAL FORCE : 13.8N MAX  
 PUSH IN STRENGTH : 19.6N  
 DURABILITY : 10,000 CYCLES
  - MATERIAL :**  
 HOUSING : LCP UL94V-0 BLACK  
 SLIDE : LCP UL94V-0 BLACK  
 LATCH : PHOSPHOR BRONZE  
 CONTACT:PHOSPHOR BRONZE  
 SHELL:SUS304  
 SPRING:STAINLESS STEEL  
 CRANK-AXLE:STAINLESS STEEL



PCB LARYUOT(GENERAL TOLERANCE±0.05mm)

CARD INSERT LARYUOT

PIN ASSIGNMENTS

Pin#	Name	Description
1	DAT2	Data Line(Bit 2)
2	CD/DAT3 <sup>2</sup>	Card Detect/Data line(Bit 3)
3	CMD	Command/Response
4	V <sub>DD</sub>	Supply voltage
5	CLK	Clock
6	V <sub>SS</sub>	Supply voltage ground
7	DAT0	Data Line (Bit 0)
8	DAT1	Data Line (Bit 1)

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION
LINEAR	ANGLE	
X. ±	X° ±	UNITS
.X ±	.X° ±	MM
.XX ±	.XX° ±	SCALE
.XXX±	.XXX° ±	SIZE
APPD		A4
CHKD		
DRAW	Z	DEC. 10'2010

**GTK** GOLD-TEK ELECTRIC CO., LTD.

TITLE: T-Flash(Micro SD) Push/Push Type

PART NO. **TFMS08TK-PP**

CAD NO. 1342

F:\PDF\CF\CF-0068

SHEET 1 OF 2

圖面編號:GTKSD2834-A(2)

RoHS COMPLIANT






REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	DEC. 10'10

- Package operation explain:
- 1.Package operations is required to wear finger cots to avoid to touch the products.
  - 2.When pick up the product into the box,should take the left and right side of the face,and don't hit solder angle.
  - 3.Putting a cardboard on the bottom of carton and top.
  - 4.Four angles of the carton need to put into a 3-angle liningfor support.
  - 5.The outer product of each volume .
  - 6.Wrapped the prouct 10 into the waterproof bag in each set overlap(lable side up).

No	Name	Part No	Amount	Note
1	REEL	REEL330*330*30(mm)	10	
2	Carton	PAPERBOX350*350*325(mm)	1	
3	Triangle lining	PAPER DISK298*230(mm)	4	Folded into a triangular cardboard
4	Cardboard	PAPER DISK298*230(mm)	2	
5	Protection Zone	TAPE-P-24*0.33(mm)	1	Using for the outermost
6	On the strip	TAPE-U-21*0.06(mm)	1	
7	Below the strip	TAPE-D-24*0.33(mm)	1	
8	Waterproof bag	BAG600*600*0.12(mm)	1	
9	Dried		2	

Packing Size	NO	FINISHED PRODUCTS(PCS)
	PCS/REEL	1000
	REEL/BOX	10
	PCS/BOX	10000

Note:1.The boxes which are not full should be filled with cushioning materials.  
2.If there's special need,can make some adjustments according to the realistic requirement.

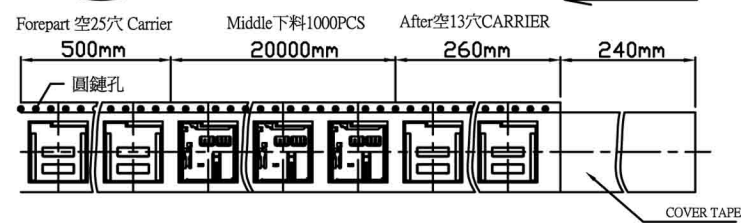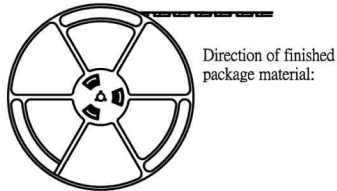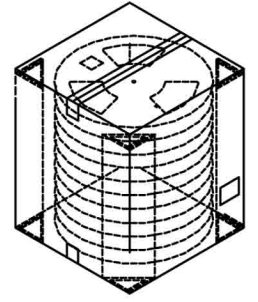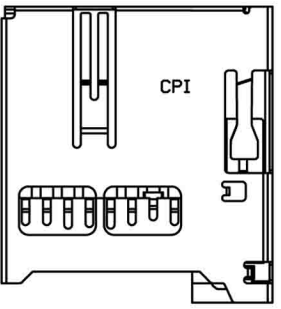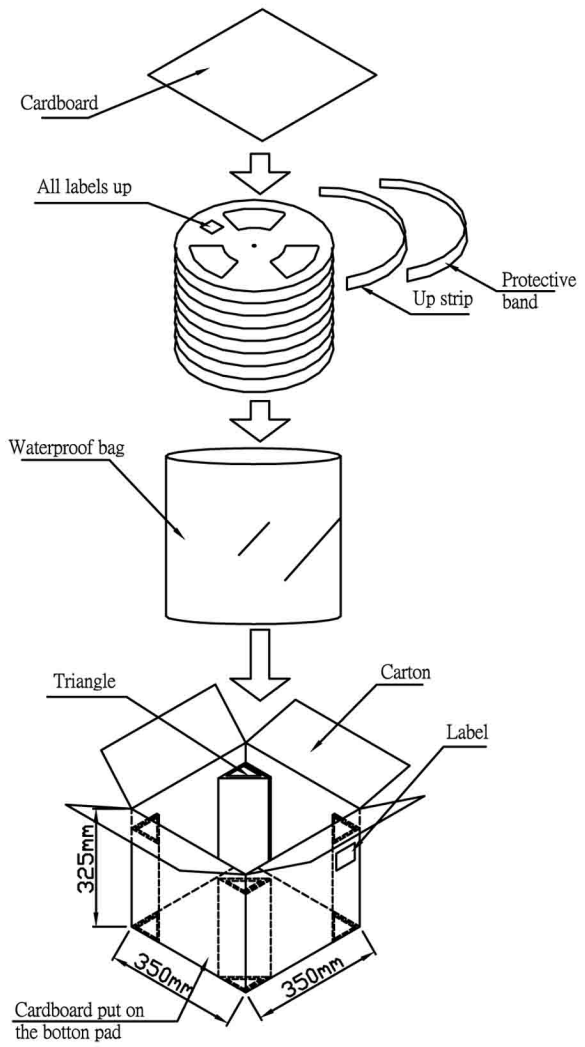

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION
LINEAR	ANGLE	UNITS
X. ±	X° ±	MM
.X ±	.X° ±	SCALE
.XX ±	.XX° ±	SIZE
.XXX±	.XXX° ±	A4
APPD		
CHKD		
DRAW	Z	DEC. 10'2010

**GTK GOLD-TEK ELECTRIC CO., LTD.**

TITLE: T-Flash(Micro SD) Push/Push Type

PART NO. **TFMS08TK-PP**

CAD NO. I342

F:\PDF\CF\CF-0068

SHEET 2 OF 2

圖面編號:GTKSD2834-A(2)